

Wiha Insulated Hex L-keys



1000Volt

136 Inch Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex	mm	Inch	Inch	lbs.
13670	1/16	79	3.1	.375	.05
13671	5/64	84	3.3	.50	.05
13672	3/32	89	3.5	.625	.05
13673	7/64	94	3.7	.625	.06
13663	1/8	104	4.1	1.0	.06
13665	5/32	104	4.1	1.0	.06
13666	3/16	134	5.3	1.25	.10
13667	7/32	134	5.3	1.5	.12
13668	1/4	134	5.3	1.5	.16
13669	5/16	144	5.7	1.5	.24
13662	3/8	234	9.2	1.63	.51
13664	1/2	234	9.2	1.63	.77




1000Volt

136 Metric Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex	mm	Inch	mm	lbs.
13650	1.5	100	3.9	20	.09
13651	2.0	105	4.1	20	.09
13652	2.5	115	4.5	20	.09
13653	3.0	130	5.1	25	.10
13654	4.0	120	4.7	40	.10
13655	5.0	140	5.5	45	.10
13656	6.0	140	5.5	45	.13
13658	8.0	150	5.9	50	.24
13659	10.0	220	8.7	50	.51
13657	12.0	260	10.2	60	.77

Insulation Test Standards:
Insulation according to ASTM, F-1505, EN/IEC 60900 and CSA

Insulation
Applied directly onto blade for permanent bonding

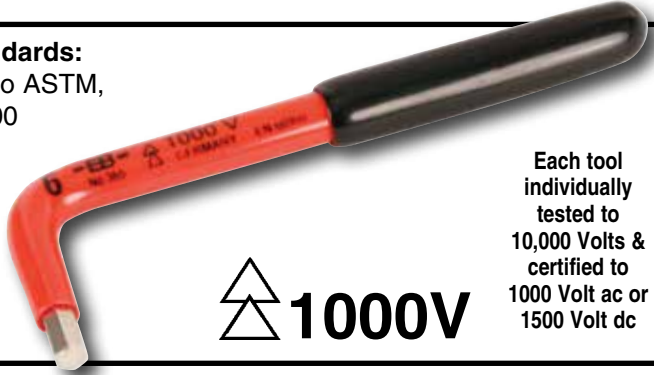

1000V

Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc

1000Volt

13690 8 Piece Insulated Inch Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13690	1/8	4.1	1/4	5.3	2.17
	5/32	4.1	5/16	5.7	
	3/16	5.3	3/8	9.2	
	7/32	5.3	1/2	9.2	

1000Volt

13694 12 Pc. Insulated Inch Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13694	1/16	3.1	3/16	5.3	2.40
	5/64	3.3	7/32	5.3	
	3/32	3.5	1/4	5.3	
	7/64	3.7	5/16	5.7	
	1/8	4.1	3/8	9.2	
	5/32	4.1	1/2	9.2	

1000Volt

13691 7 Piece Insulated Metric Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13691	3.0	130	8.0	150	2.07
	4.0	120	10.0	220	
	5.0	140	12.0	260	
	6.0	140			

1000Volt

13693 10 Piece Insulated Metric Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13693	1.5	100	5.0	140	2.26
	2.0	105	6.0	140	
	2.5	115	8.0	150	
	3.0	130	10.0	220	
	4.0	120	12.0	260	