

# Two-Fiber Patch Cords

CORNING

## Features and Benefits

### Superior Performance Testing

Every termination is tested to ensure the highest in network performance

### State-Of-The-Art Manufacturing Processes

Corning proprietary manufacturing processes and advanced technology result in unsurpassed product consistency

### Corning advantage


Integrated developer and manufacturer of cable, connectors and fiber to ensure overall patch cord performance

Corning offers the most complete line of connectors and factory-terminated cables, from single-fiber patch cords to high-fiber-count assemblies. As the industry's leading supplier of cable assemblies, Corning's state-of-the-art manufacturing process ensures unsurpassed connector performance with products that meet or exceed all industry standards for reflectance and insertion loss. Highly trained and qualified associates thoroughly inspect the incoming fibers and ferrules, assemble and polish them using a carefully monitored and controlled process. The assemblies undergo rigorous performance testing to ensure optimal quality in every connector.

Corning's preterminated assemblies use only high-quality Corning optical fibers to ensure total performance quality.



LC Duplex to LC Duplex Patch Cords  
| Photo CRR3409

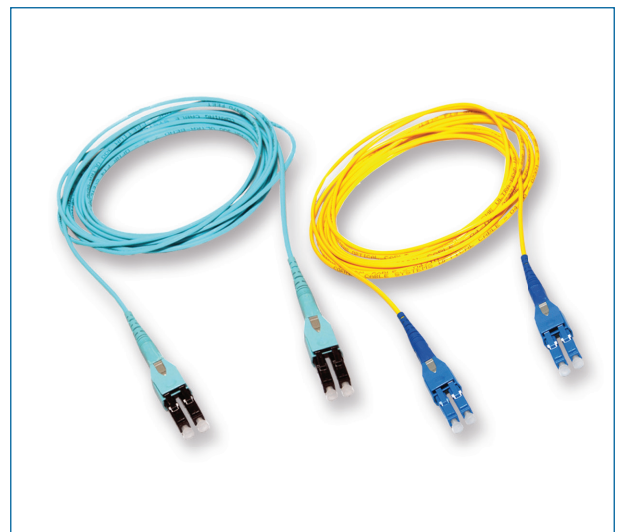

Reverse Polarity Uniboosts  
| Photo LAN2217-2218


CORNING

# Two-Fiber Patch Cords

CORNING

## Reverse Polarity Uniboot Duplex Patch Cords

Reverse Polarity Uniboot Duplex patch cords allow for the quick and easy conversion from a TIA-568 A-B polarity to a TIA-568 A-A polarity without exposing the fibers or needing any tools. This patch cord comes with a straight-through polarity from the factory, but you can convert it to a flipped patch cord with no tools. This uniboot design allows one cable to carry both fibers, reducing patch cord bulk when routing.

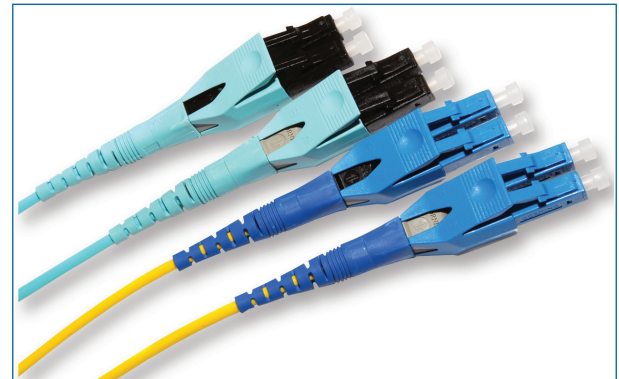


Reverse Polarity Uniboot Duplex Patch Cords  
| Photo LAN2223

## Specifications

LC Uniboot Patch Cord Specifications			
Connector	Connector Code	Max. Attenuation (dB)	Return Loss (dB)
MM LC Uniboot	79	0.5	≤26
SM LC Uniboot	78	0.5	≤55

## Ordering Information

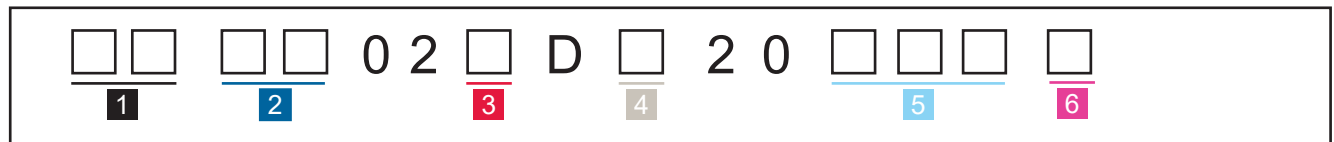

- 1** Select connector one type.
- 79 = Multimode LC Uniboot (OM3/OM4)
  - 78 = Single-mode LC UPC Uniboot (OS2)

- 2** Select connector two type.
- 79 = Multimode LC Uniboot (OM3/OM4)
  - 78 = Single-mode LC UPC Uniboot (OS2)

- 3** Select fiber type.
- T = 50 μm multimode (OM3)
  - Q = 50 μm multimode (OM4)
  - G = Single-mode Ultra (OS2)

- 4** Select flame rating.
- 1 = Riser
  - 8 = Plenum

- 5** Select length.
- 001-250 (tip-to-tip)

- 6** Select unit of measure.
- F = Feet
  - M = Meters

CORNING

# Two-Fiber Patch Cords

CORNING

## Duplex Patch Cords

Corning patch cords are ordered using five easy steps. The steps involve the selection of connector(s), fiber type, cable, length and unit of measure. The format/steps are listed below.

## Specifications

Two-Fiber Patch Cord Specifications				
Fiber Type	Connector	Connector Code	Max. Attenuation (dB)	Return Loss (dB)
Multimode	LC	05	0.4	≤ 26
	SC	57	0.4	≤ 26
	ST® compatible	50	0.4	≤ 26
Single-mode	LC	04	0.25	≤ 55
	SC	72	0.25	≤ 55
	ST compatible	61	0.25	≤ 55

## Ordering Information

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	0 2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>1</b>				<b>2</b>		<b>3</b>				<b>4</b>		<b>5</b>

### 1 Select connector code.

00 = No connectors (use when ordering a pigtail)

#### Multimode

03 = LC simplex  
 05 = LC duplex  
 39 = SC simplex  
 50 = ST® compatible  
 57 = SC duplex  
 See Note 1.

#### Single-mode

02 = LC UPC simplex  
 04 = LC UPC duplex  
 22 = LC APC simplex  
 44 = SC APC simplex  
 58 = SC UPC simplex  
 61 = ST compatible UPC  
 72 = SC UPC duplex

### 3 Select cable type.

5120 = Riser 2.0 mm  
 5820 = Plenum 2.0 mm  
 5116 = Riser 1.6 mm  
 5816 = Plenum 1.6 mm  
 5112 = Riser 1.2 mm (SMF LBL only)

### 2 Select fiber type.

T = 50 μm multimode (OM3)  
 Q = 50 μm multimode (OM4)  
 K = 62.5 μm multimode (OM1)  
 G = SMF Ultra (OS2)  
 U = SMF LBL (OS2) (1.2 mm only)

### 4 Select cable assembly length.

001-250 (tip-to-tip)

### 5 Select unit of measure.

F = Feet  
 M = Meters

#### Notes:

1) Select connector code based on type of adapter used at the patch panel and the electronic interface connector. Always use the lowest code first when constructing the part number.

CORNING